

FROM COMPLETE FREEDOM TO THE PERFECT CIRCLE

THE WIGGLE MODULES ARE FLEXIBLE IN APPLICATION: THE SHAPE OF THE ROW LIGHTING SYSTEM CAN BE DEFINED AND ASSEMBLED ON SITE. THE LENGTH OF THE LINE CAN BE EXTENDED LIMITLESSLY. CONTINUOUS STRAIGHT LINES OF LIGHT, BEAUTIFULLY DEFINED CURVES OR CIRCLE – YOU DECIDE WHAT BEST SUITS THE SPACE. LIGHT ADAPTS ITSELF TO ARCHITECTURE FOR THE FIRST TIME.

WIGGLE CIRCLE

Quick and easy installation by bending on site thanks to pre-defined angles



Easy delivery in straight form

ø 1 m or ø 3 m




A single, pre-defined setting simplifies on-site assembly

WIGGLE LED RANGE

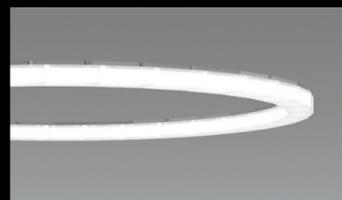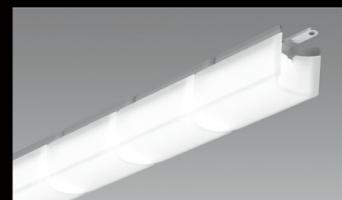

LINE OF LIGHT, SHAPE CAN BE DEFINED ON SITE

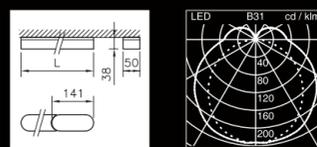


1510 mm or 2980 mm

Including mounting clamps



EXTENSION

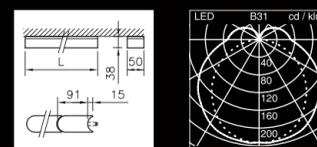


2980 mm

Incl. mechanical connectors and mounting clamps



CIRCLE

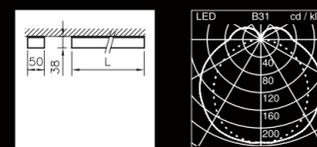

ø 970 mm or 2930 mm

Incl. mechanical connectors and mounting clamps

Concerns all three versions: 4000 K, 3000 K, 2700–6500 K (Tunable)
Operating units included in delivery
Operating units not integrated into the housing

MOUNTING ACCESSORIES



MOUNTING CLAMP KIT

for mounting on walls and ceiling included



WIRE CORD SUSPENSION KIT

for pendant mounting optional



DRILLING TEMPLATE

optional

Product video and further information www.regent.ch/wiggle

Subject to technical modifications.
Regent assumes no liability for printing errors.
Edition 2, June 2019



WIGGLE

MADE FOR AN IDEA.
YOURS.

WIGGLE. FEEL FREE TO DESIGN THE LIGHTING LAYOUT TO SUIT YOU BEST. WE WILL NOT HOLD YOU BACK.

AS STRAIGHT, CURVED OR CIRCULAR

Flexible line of light, shape can be defined on site

Can be adapted on site to align with the architecture

Can be formed to create a unique luminous object

Wiggle comprises 16 (32) inseparable elements which can be rotated against one another $\pm 25^\circ$ max.

DESIGN


High-quality luminaires with rotatable joints for a high degree of formability

Available for surface mounting on ceilings and walls or for pendant mounting

Design by Andreas Tobler

TECHNICAL DATA

Ceiling and wall mounted luminaire or pendant mounting
Luminous flux of luminaire: 4000 lm/1.5 m (Tunable 3500 lm/1.5 m)
Colour temperature: 4000 K, 3000 K, 2700–6500 K (Tunable)
Colour Rendering Index: CRI \geq 80
Maintained luminous flux: L80 (B50) 50'000 h
All versions suitable for emergency lighting (DC-compatible)
Dimmable digital DALI
MOUNTING ACCESSORIES
Wire cord suspension set, drilling template, mounting clamp set

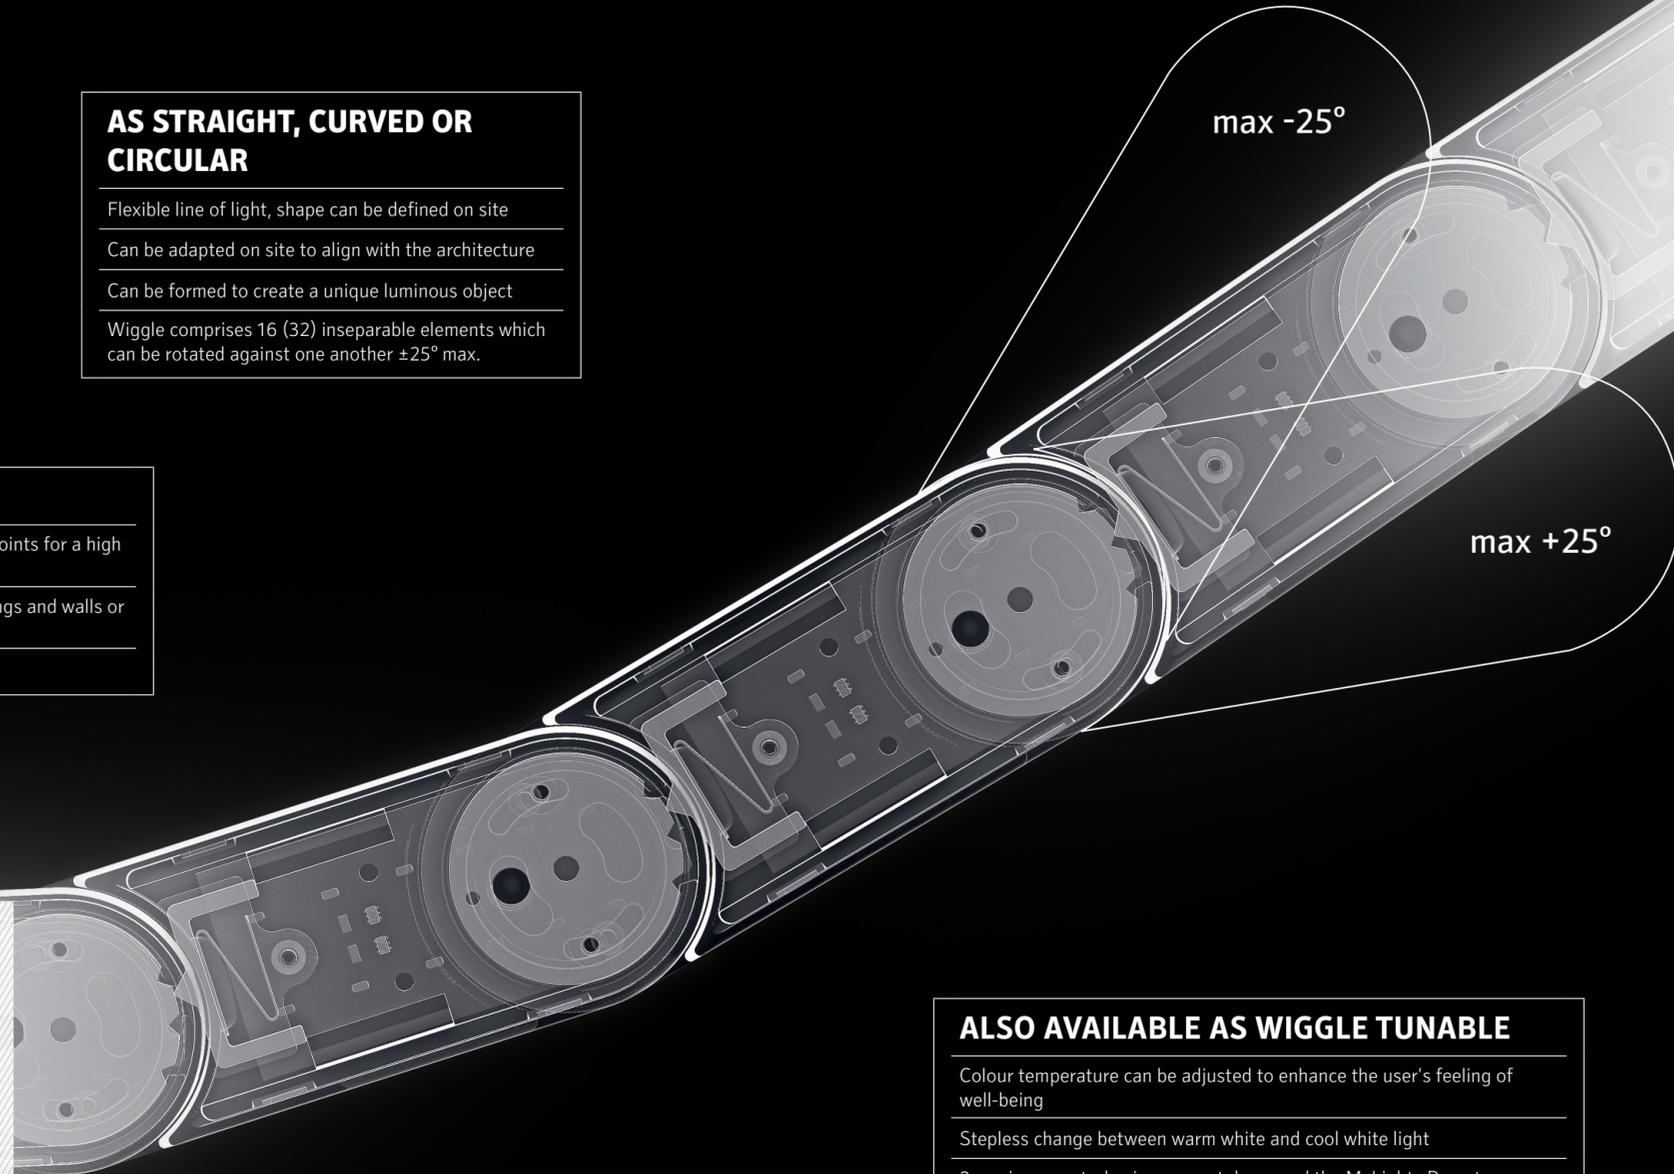

ALSO AVAILABLE AS WIGGLE TUNABLE

Colour temperature can be adjusted to enhance the user's feeling of well-being

Stepless change between warm white and cool white light

2 versions: control using a smartphone and the MyLights Remote app or via integration in a DALI system

2700 K 6500 K

MODULAR SYSTEM

Continuous lines of light can be assembled to create straight lines or curves of any length using the 1.5 m long fixtures

The individual Wiggle modules can be extended to form practically unlimited lengths

EXCELLENT QUALITY OF LIGHT

Highly efficient uniform spread of light

Direct-indirect light emission, omni-directional

APPLICATION AREAS

Office & Education: reception rooms, counters, conference rooms

Shop & Hospitality: restaurants, foyers and lobbies, corridors



Left : Bethesda Hospital Basel, Switzerland / Right : Exhibition booth Regent Lighting